



FEATURES:

- **EXCELLENT UV PROTECTION:** Unique UV absorbers and enhanced micronized pigments protect the wood from the sun's UV rays.
- **LOW VOC. FORMULA:** LOG+SIDING is not harmful to the environment.
- **SUITABLE FOR UNSEASONED WOOD:** The unique formula allows for use on wood with higher moisture content (21% or less).
- **BREATHABLE FINISH:** LOG+SIDING breathability reduces moisture build up in wood and stabilizes wood to reduce warping and checking.
- **EASY TO APPLY:** LOG+SIDING can easily be applied by brush, sprayed and back brushed.
- **EASY TO MAINTAIN:** The unique formula does not peel, flake or blister; no sanding is required prior to the maintenance coat. Simply wash the surface, let dry and apply a single application of LOG+SIDING to keep the wood surface protected and beautiful.
- **EASY CLEAN UP:** Soap and water clean up.


LOG+SIDING

Protects + Beautifies:

- LOG HOMES
- WOOD SIDING
- CEDAR HOMES
- SHAKES + SHINGLES

Timber Pro LOG+SIDING is a specialized professional-grade wood finish used in the industry by log-home builders, manufacturers, crafters, timber framers, contractors and prefinish operations. Timber Pro's unique long-lasting formula has become the product of choice for serious wood lovers.

Resort operators, home owners and cottagers alike have chosen Timber Pro LOG+SIDING because it preserves the natural beauty and integrity of their investment. Timber Pro LOG+SIDING is also environmentally safe, easy to use and simple to maintain.

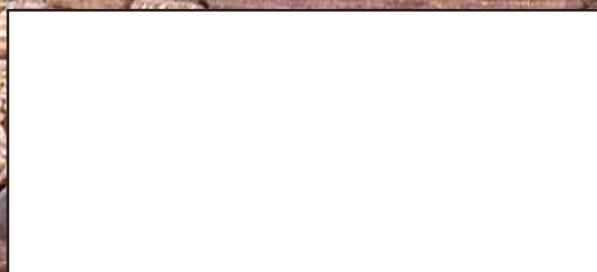

DEALER STAMP

604.270.4244
timberprocoatings.ca
timberprocoatings.com



LOG+SIDING

Protects + Beautifies

Where to Use

Timber Pro LOG+SIDING can be used on all new and reconditioned wood exterior and interior vertical surfaces. LOG +SIDING can be used on wood species such as cedar, fir, pine, cypress, redwood, spruce exterior-grade plywood and pressure-treated wood. LOG+SIDING can be used for:

- Log Homes
- Trim
- Shingles
- Outdoor Furniture
- Doors/Windows
- Shakes

RESTRICTIONS

- Always use a colour coat before using a clear coat
- Do not use clear coat alone for exterior surfaces
- Do not thin the product
- Do not apply on surfaces hot to the touch
- Do not apply in direct sunlight or temperatures below 10C (50F) and above 25C (80F)
- Do not apply over previously coated surfaces

Application

- Do a colour test before proceeding with the entire job. Apply two colour coats and one clear coat. Allow each coat to dry before proceeding with the next coat.
- Check moisture content of the wood. Apply coating when the surface moisture is less than 21%.
- Stir the product thoroughly before and occasionally during use.
- Best results are with a quality nylon/polyester brush. Airless sprayer application is acceptable but must be immediately back brushed.
- Siding may be pre-coated with one or two colour coats of LOG+SIDING before installation. Back priming is recommended for siding.
- Generously coat the surface and all exposed end grain. Apply as liberally as possible without runs. Do not try to stretch the coverage. Apply in the direction of the grain. On rough-sawn surfaces, thoroughly saturate and back brush to soak as much product as possible into the wood. If spraying, spray until product runs slightly, then immediately back brush. Avoid lap marks by starting at one end of a given surface and while maintaining a wet edge, follow through to the opposite end of the surface area. It is extremely important to allow each coat to dry before proceeding with the next coat.

Clean Up

Wash with soap/mild detergent and water.

Coverage

Smooth wood: 250-300 square feet per gallon.

Rough wood: 150-200 square feet per gallon.

Hardwoods: 300-350 square feet per gallon.

Note: Coverage will vary with the porosity of the wood.

THE COMPLETE LINE OF TIMBER PRO PRODUCTS

Log+Siding
Ultra DF
Roof Treatment
Yard Treatment

Ultra LS
Crystal Urethane
Strip+Brite
EZ PRO

Deck+Fence
Timber Seal
Interior Stain Formula

XP
Clean+Brite

Timber Pro Coatings Canada

Unit 140, 12051 Horseshoe Way, Richmond BC, V7A 4V4

Tel: 604-270-4244 email: canadainfo@timberprocoatings.com

www.TimberProCoatings.ca

www.TimberProCoatings.com