

ULTRA LS

ULTRA LS



FEATURES:

- **EXCELLENT UV PROTECTION:** Unique UV absorbers and enhanced micronized pigments protect the wood from the sun's UV rays.
- **LOW VOC. FORMULA:** ULTRA LS is not harmful to the environment.
- **SUITABLE FOR UNSEASONED WOOD:** The unique formula allows for use on wood with higher moisture content (21% or less).
- **FAST-DRY FINISH:** Early spring or late fall application is possible with this unique formula that dries to the touch in two to four hours.
- **BREATHABLE FINISH:** ULTRA LS breathability reduces moisture build up in wood and stabilizes wood to reduce warping and checking.
- **EASY TO APPLY:** ULTRA LS can easily be applied by brush, sprayed and back brushed.
- **EASY TO MAINTAIN:** Unique formula does not peel, flake or blister; no sanding is required prior to the maintenance coat. Simply wash the surface, let dry and apply a single application of ULTRA LS to keep the wood surface protected and beautiful.
- **EASY CLEAN UP:** Soap and water clean up.


ULTRA LS

Protects + Beautifies:

- **LOG HOMES**
- **WOOD SIDING**
- **CEDAR HOMES**
- **SHAKES + SHINGLES**

Timber Pro Ultra LS is a specialized professional-grade wood finish used in the industry by log-home builders, manufacturers, crafters, timber framers, contractors and pre-finish operations. Timber Pro's unique formula is designed to allow application in lower temperatures, therefore extending the application time frame to include early spring and late fall.

Resort operators, home owners and cottagers choose Timber Pro ULTRA LS to preserve the natural beauty and integrity of their investment. ULTRA LS is also environmentally safe, easy to use, and simple to maintain.

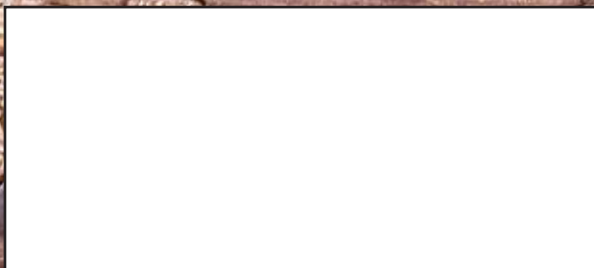

DEALER STAMP

604.270.4244
timberprocoatings.ca
timberprocoatings.com



ULTRA LS

Protects + Beautifies

Where to Use

Timber Pro ULTRA LS is a fast-dry formula specifically designed for use in adverse conditions such as high humidity, low temperatures and other conditions normally outside of our LOG+SIDING. ULTRA LS can be used on all new and reconditioned wood exterior and interior vertical surfaces. ULTRA LS can be used on wood species such as cedar, fir, pine, cypress, redwood, spruce exterior-grade plywood and pressure-treated wood.

ULTRA LS can be used fo

- Log Homes
- Exterior Wood Siding
- Wood Doors/Windows
- Wood Shingles
- Wood Shakes
- Trim

RESTRICTIONS

- Always use a colour coat before the clear coat
- Always read and follow the "Directions for Use" printed on the product container/brochure
- Do not apply in direct sunlight or temperatures below 7C (45F) or above 18C (65F)
- Do not apply on surfaces hot to the touch
- Do not thin the product
- Do not apply over previously coated surfaces

Application

- Do a colour test before proceeding with the entire job.
- Apply two coats of colour and one clear coat; it is extremely important to allow each coat to completely dry before proceeding with the next coat.
- Check the moisture content of the wood. Apply coating when surface moisture content is less than 21 %.
- Stir the material thoroughly before and occasionally during use.
- Siding may be precoated with one or two coats of ULTRA LS before installation. Back priming is recommended for siding.
- Application is best with a quality nylon/polyester brush or with an airless sprayer and back brushed immediately after. Generously coat the surface and all exposed end grain. Apply as liberally as possible without runs. Do not try to stretch the coverage. Apply in the direction of the grain. On rough-sawn surfaces, thoroughly saturate and back brush to soak as much product as possible into the wood. If spraying, spray until product runs slightly and then immediately back brush. Avoid lap marks by starting at one end of a given surface and while maintaining a wet edge, follow through to the opposite end of the surface area.

Clean Up

Wash with soap/mild detergent and water

Coverage

Smooth wood: 250-300 square feet per gallon.

Rough wood: 150-200 square feet per gallon.

Hardwoods: 300-350 square feet per gallon.

Note: Coverage will vary with the porosity of the wood.

THE COMPLETE LINE OF TIMBER PRO PRODUCTS

Log+Siding
Ultra DF
Roof Treatment
Yard Treatment

Ultra LS
Crystal Urethane
Strip+Brite
EZ PRO

Deck+Fence
Timber Seal
Interior Stain Formula

XP
Clean+Brite

Timber Pro Coatings Canada

Unit 140, 12051 Horseshoe Way, Richmond BC, V7A 4V4

Tel: 604-270-4244 email: canadainfo@timberprocoatings.com

www.TimberProCoatings.ca

www.TimberProCoatings.com